

Checking Accuracy of the WAN Utilisation Distribution Report


- [How To Check Accuracy of the WAN Utilisation Distribution Report](#)
- [Related Topics](#)
 - [WAN Utilisation Distribution Report](#)
 - [WAN Utilisation Distribution Report: 95th Percentile Calculation](#)

How To Check Accuracy of the WAN Utilisation Distribution Report

The WAN Utilisation Distribution Report uses 'mode=>MAX' to ensure it is using the most accurate summarized data available for the task at hand. NMIS version 8.6.8G (and newer) export data using both 'mode=>AVERAGE' and 'mode=>MAX'.

The best way to understand the difference between 'mode=>AVERAGE' data and 'mode=>MAX' data is to use NMIS version 8.6.8G (and newer) export data functionality and compare the returned data for 'mode=>AVERAGE' and 'mode=>MAX'.

Open NMIS, login and choose the desired node we wish to work with - in the example image below we have chosen BANORTE_CAJ_N40051_NIHON_PLAST_II_RT01 highlighted in blue:

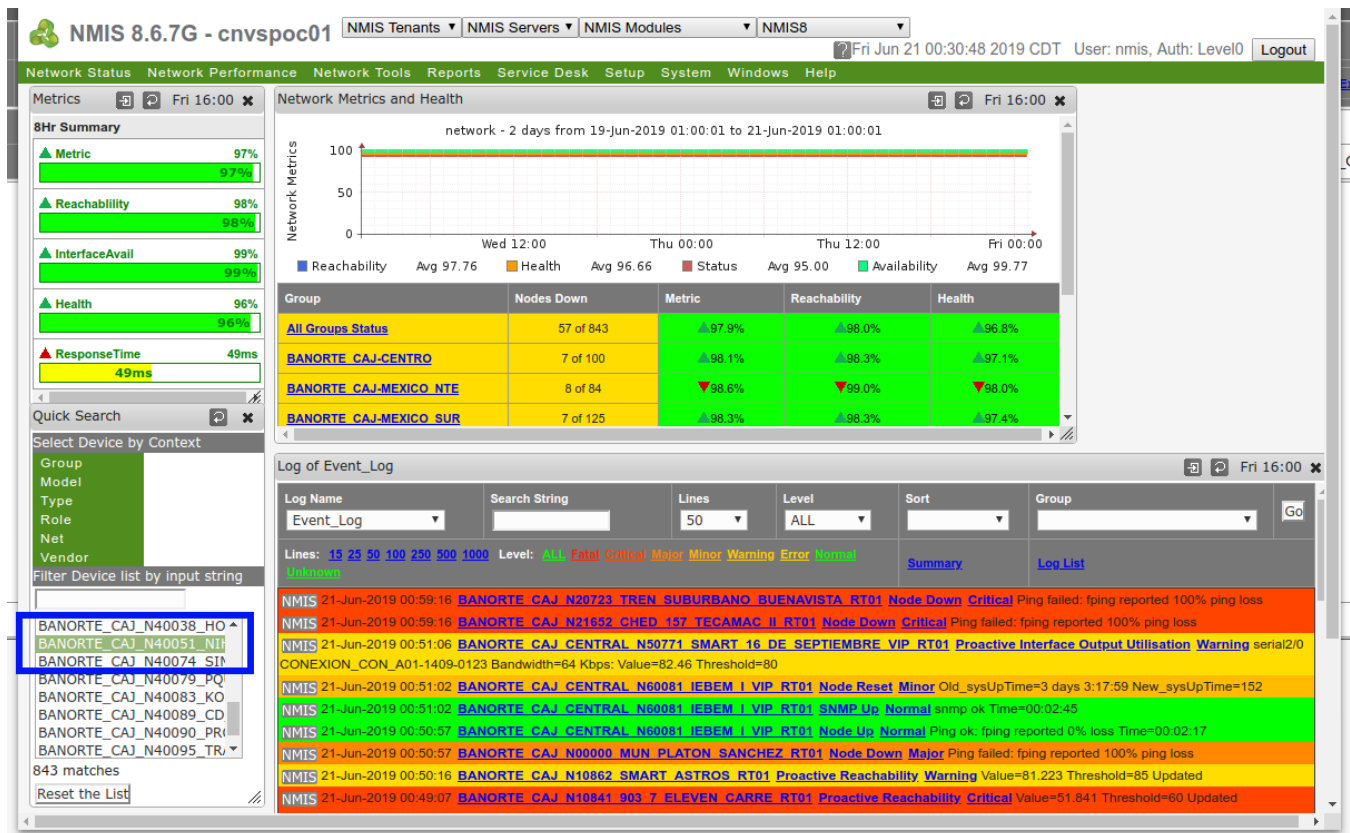

NMIS will then open a form for that desired node - to get NMIS node.pl to open click on one of the graph images - for example the graph highlighted in blue on this image:

Related Topics

- [WAN Utilisation Distribution Report](#)
- [WAN Utilisation Distribution Report: 95th Percentile Calculation](#)

