

How to discover a single Device

Discover a single device.

With this feature that was implemented in the Open-Audit 2.0.6 release, you can audit a single machine to get an idea of how OpenAudit works. Furthermore, you can use this feature to add a single device without performing a full discovery on a subnet.


Watch support engineer Paul McClendon quickly show you how to discover a single device.

Discover a single device Walk-Through




If you use a single IP or a range, please ensure that before you run a Discovery that you have added a corresponding [Network](#) so Open-Audit will accept audit results from those target IP's.

Navigate to the menu and go to Discover -> Discoveries -> Discover a single device

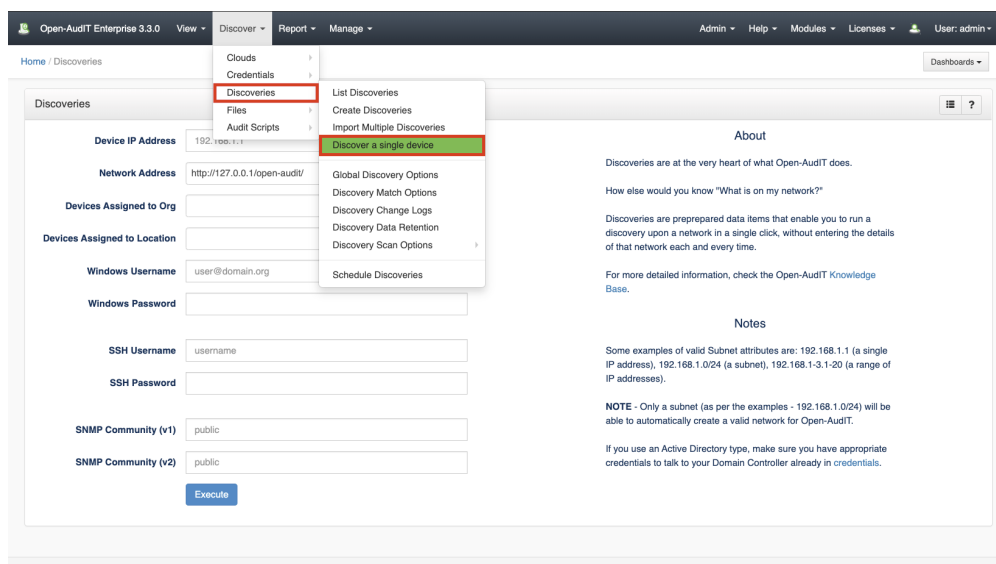

Next, enter the Network Address of the machine you wish to audit and ensure you have added the credentials for this device. As displayed below there are places to enter credentials using a Windows username, SSH, or SNMP Community. Choose the option that best suites your situation. After all the required information is entered press the **Execute** button for the results.

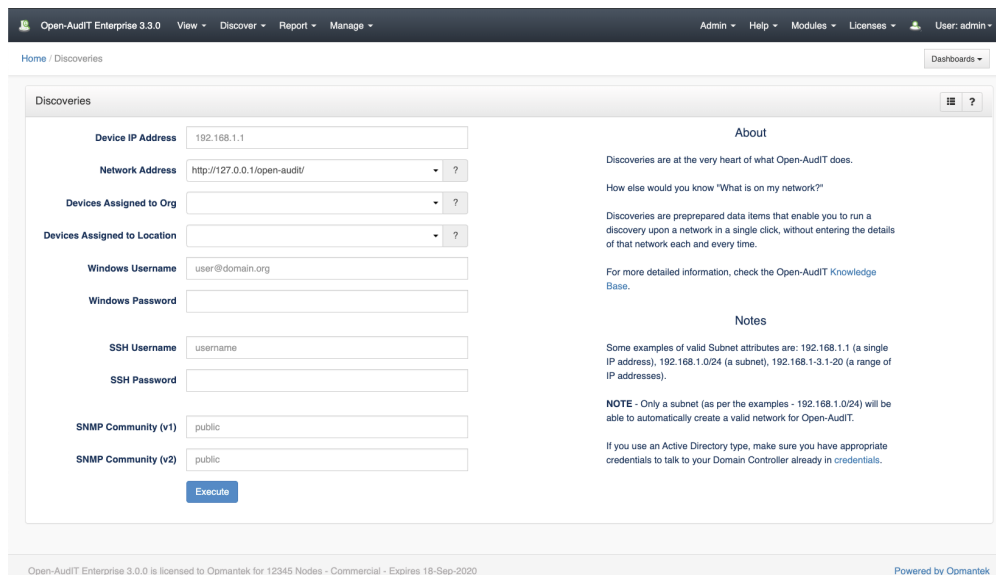

You will see a blue bar at the top of the window that indicates that the discovery of that device is running.

The screenshot shows the Open-Audit Enterprise 3.3.0 interface. The top navigation bar includes 'Open-Audit Enterprise 3.3.0', 'View', 'Discover', 'Report', 'Manage', 'Admin', 'Help', 'Modules', 'Licenses', and 'User: admin'. The breadcrumb trail is 'Home / Discoveries / Device Discovery For 192.168.88.0'. A green banner at the top says 'Discovery started.' The left sidebar has a menu for 'Device Discovery for 192.168.88.0' with options: Summary, Details, Logs (selected), All IP Addresses, Responding IPs, Devices Discovered, and Devices Unknown or Unclassified. The main area is titled 'Logs' and shows a table of log entries. The table has columns: Timestamp, ID, IP, Status, and Message. The entries show the discovery process from start to finish.

Timestamp	ID	IP	Status	Message
2020-03-11 08:22:53	8503	127.0.0.1	start	Starting discovery for Device Discovery for 192.168.88.0
2020-03-11 08:22:53	8504	127.0.0.1	notice	Scanning 1 IP addresses using Nmap to test for response.
2020-03-11 08:22:54	8505	127.0.0.1	notice	Nmap response scanning completed. Time to execute: 0.4 seconds.
2020-03-11 08:22:54	8506	127.0.0.1	notice	Updating discovery log with non-responding IPs Time to execute: 0.0 seconds.
2020-03-11 08:22:54	8508	127.0.0.1	notice	No IPs are responding. You may wish to check your discovery configuration.
2020-03-11 08:22:54	8509	127.0.0.1	finished	Discovery has finished.

Once the discovery has finished, navigate back to the Open-Audit home page to see the discovered device. You should see some of the charts on the dashboard screen start to populate with information.

To view more information on the device just audited: From the dashboard you will see a menu on the left of the screen. From there click on "My Devices" and select the device that was just audited by clicking the blue box details icon to the left.

The screenshot shows the Open-Audit Enterprise 3.3.0 interface. The top navigation bar is the same. The breadcrumb trail is 'Home / Devices'. The left sidebar has a menu for 'Resources (All Devices)' with options: Summary, Details, Attachments, Call Details, Change Log, Clusters, Credentials, Discovery Log, Edit Log, Fields, Images, IP Addresses, Location, Modules, Opnartek Details, Owned By, Purchase, SNAP Details, Hardware, Settings, and Applications. The main area is titled 'Resources (All Devices)' and shows a table of devices. The table has columns: System ID, System Icon, System Type, System Name, System IP, System DNS FQDN, System Identification, System Description, System Manufacturer, System OS Family, and System Status. The first device is highlighted with a blue box.

System ID	System Icon	System Type	System Name	System IP	System DNS FQDN	System Identification	System Description	System Manufacturer	System OS Family	System Status
192.168.88.254		router	asgard	192.168.88.254	asgard.opnartek.com	Router from Cisco Systems	Cisco IOS Software, 1841 Software (C1841-ADVENTERPRISEK9-M, Version 12.4(25), RELEASE SOFTWARE (fc2)) Technical Support: http://www.cisco.com/techsupport Copyright (c) 1986-2011 by Cisco Systems, Inc. Compiled Tue 16-Aug-11 06:21 by prod_nrl_team	Cisco Systems	Cisco IOS	production

After clicking the details button, a summary page is displayed containing information on the device selected. Using the menu on the left of the summary page you can view even more information such as the hardware, software, logs, as well as many other useful pieces of information. This information is displayed in a window below that opens after selecting a menu option. Navigate around to the different menu options to see all of the great features OpenAudit provides.

The screenshot shows the Open-Audit Enterprise 3.3.0 interface. The top navigation bar is the same. The breadcrumb trail is 'Home / Devices / asgard'. The left sidebar has a menu for 'Summary - asgard' with options: Summary, Details, Attachments, Call Details, Change Log, Clusters, Credentials, Discovery Log, Edit Log, Fields, Images, IP Addresses, Location, Modules, Opnartek Details, Owned By, Purchase, SNAP Details, Hardware, Settings, and Applications. The main area is titled 'Summary - asgard' and shows a summary of the device. The summary includes fields for Name, IP, Type, Description, OS Family, Status, Environment, Manufacturer, Model, and Serial.

Field	Value
Name	asgard
IP	192.168.88.254
Type	Router
Description	Cisco IOS Software, 1841 Software (C1841-ADVENTERPRISEK9-M, Version 12.4(25), RELEASE SOFTWARE (fc2)) Technical Support: http://www.cisco.com/techsupport Copyright (c) 1986-2011 by Cisco Systems, Inc. Compiled Tue 16-Aug-11 06:21 by prod_nrl_team
OS Family	Cisco IOS
Status	Production
Environment	Production
Manufacturer	Cisco Systems
Model	Cisco 1841
Serial	FHX11472788

Running into problems? Visit our [Troubleshooting](#) page.